

DATRON FOAM MILLS

The Perfect Alternative to Conventional PU Foam Machining

DATRON foam mills offer a cost-effective, time-saving and especially a rework-free alternative to conventional machining methods such as wire, water jet and laser cutting of polyurethane foams. The new DATRON foam mill series with the especially developed DATRON shank mills and countersinks models achieve uniquely precise results when milling PU foams.


Thus, bevels, contours and complex surface geometries can be achieved in a single operation: in the shortest time and the most absolute cost-effectiveness.

Benefits of DATRON Foam Mills:

- Time and cost saving
- High precision in machining almost all PU foams (PE, PUR, etc.)
- No reworking of the visible surfaces
- Ideal for small and medium-sized batches

Advantages over Wire, Water Jet and Laser Cutting:

- Rework-free chamfers
- Full flexibility in processing different-sized workpieces
- Reduction of the cost of parts

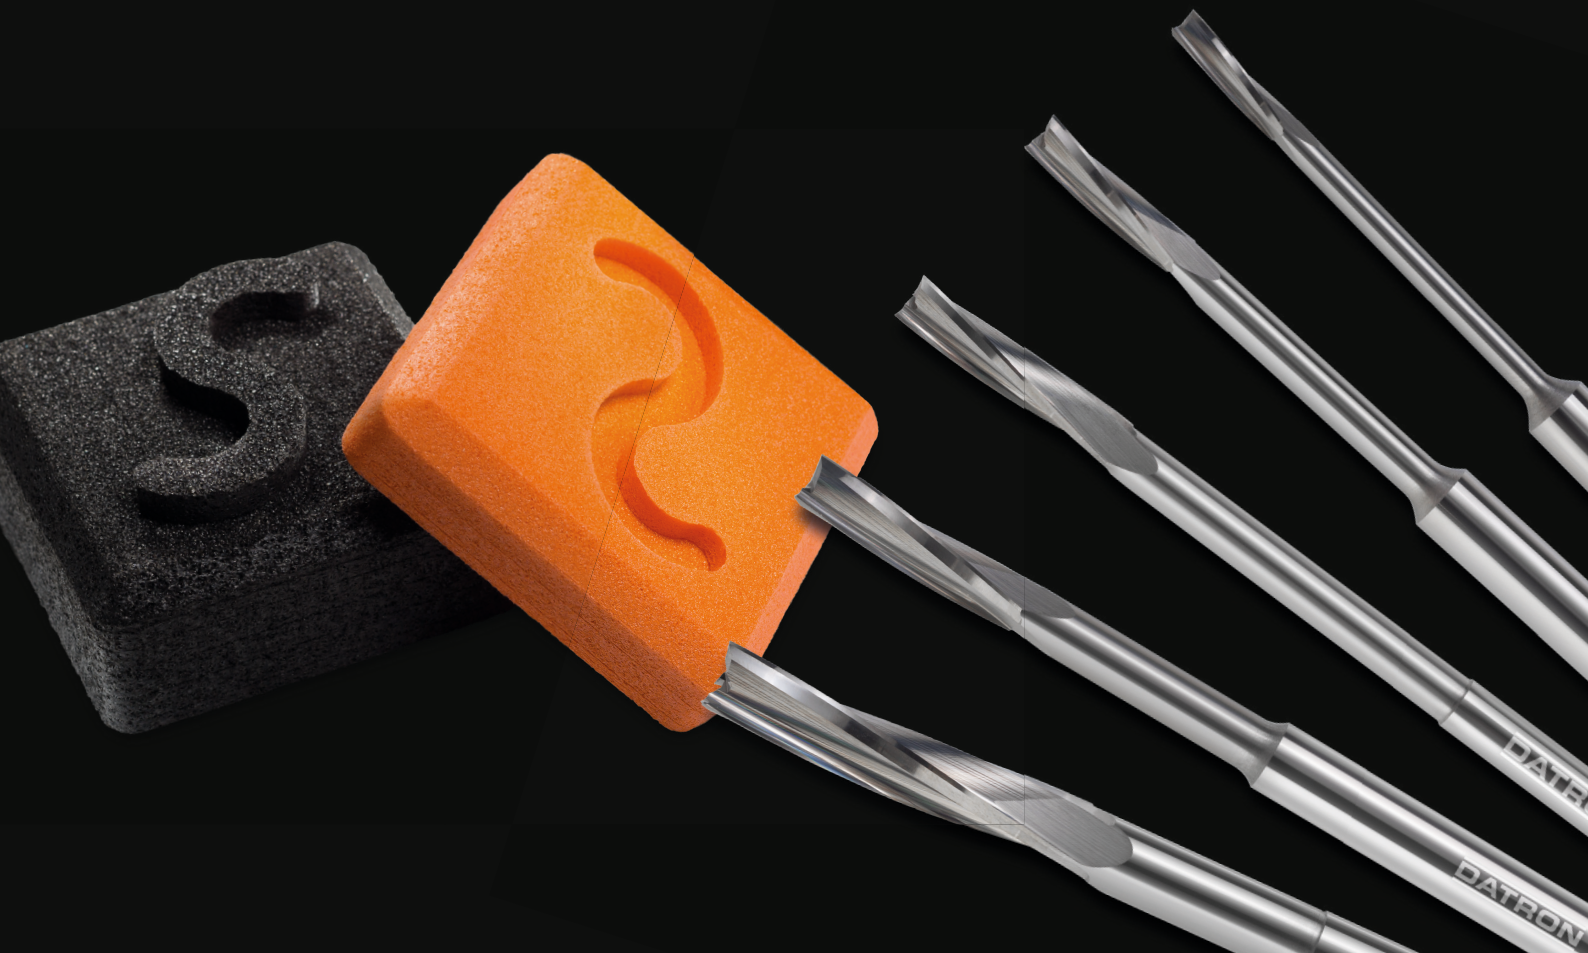

Foam Mills

Precise Cutting Capacity – Perfect Chamfer

The new foam mills, besides having finely polished cutters also feature chip channels adjusted for PU foam machining. In addition, DATRON especially perfected the special blade geometries and helix angles of the foam tool series.

FACE MILLING
Absolutely clean removal of porous materials

OUTER CONTOUR MILLING
Edges are reproduced without need for reworking

INNER CONTOUR MILLING
Perfect, burr-free cutting performance with in PU

CHAMFER MILLING
DATRON special countersink achieves ideal chamfers – unsurpassed processing quality!

Production of Top Quality Surfaces and Chamfers
Fast, accurate milling of PU foams without reworking with DATRON's new special tools.

We will be happy to provide you with detailed information at:
+49 (0)6151-1419-480

or order:
by e-mail: tools@datron.de
by phone: +49 (0)6151-1419-111
by fax: +49 (0)6151-1419-39

Our Foam Tools at a Glance:

End Mills

6 mm Shank						
Art. No.	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
00680530	3.0	6.0	2.7	75.0	12.0	41.0
0068053K	3.0	6.0	2.7	50.0	6.0	22.0
00680540	4.0	6.0	3.6	75.0	15.0	41.0
0068054K	4.0	6.0	3.6	50.0	8.0	22.0
00680550	5.0	6.0	4.5	75.0	20.0	41.0
0068055K	5.0	6.0	4.5	50.0	12.0	22.0
00680560	6.0	6.0	5.5	75.0	27.0	42.0
0068056A	6.0	6.0	5.5	100.0	27.0	71.0
0068056K	6.0	6.0	5.5	50.0	12.0	22.0

8 mm Shank						
Art. No.	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
00680580	8.0	8.0	7.5	75.0	28.0	42.0
0068058A	8.0	8.0	7.5	100.0	42.0	71.0
0068058K	8.0	8.0	7.5	50.0	16.0	25.0

10 mm Shank						
Art. No.	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
00680510	10.0	10.0	9.5	115.0	52.0	82.0
0068051K	10.0	10.0	9.5	60.0	20.0	30.0



Countersink Tools

6 mm Shank						
Art. No.	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	α (°)
0068485C	4.0	6.0	10.0	50.0	3.0	90
0068485D	4.0	6.0	12.0	50.0	4.0	90
0068485E	4.0	6.0	14.0	50.0	5.0	90
0068485F	4.0	6.0	16.0	50.0	6.0	90
0068485N	4.0	8.0	14.0	50.0	5.0	90

